
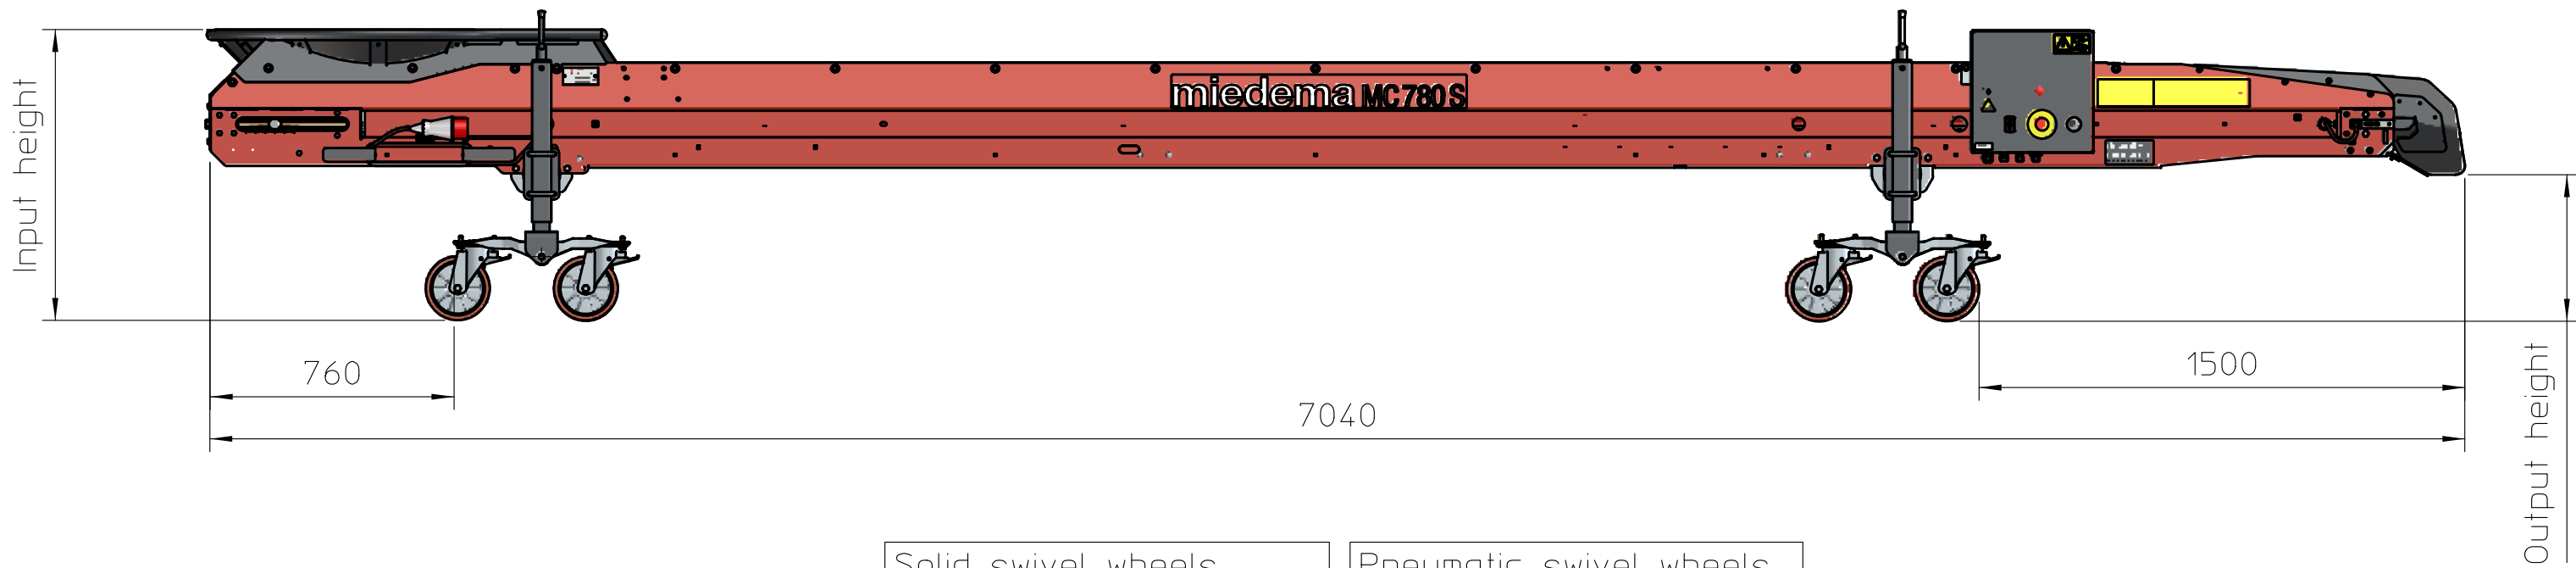
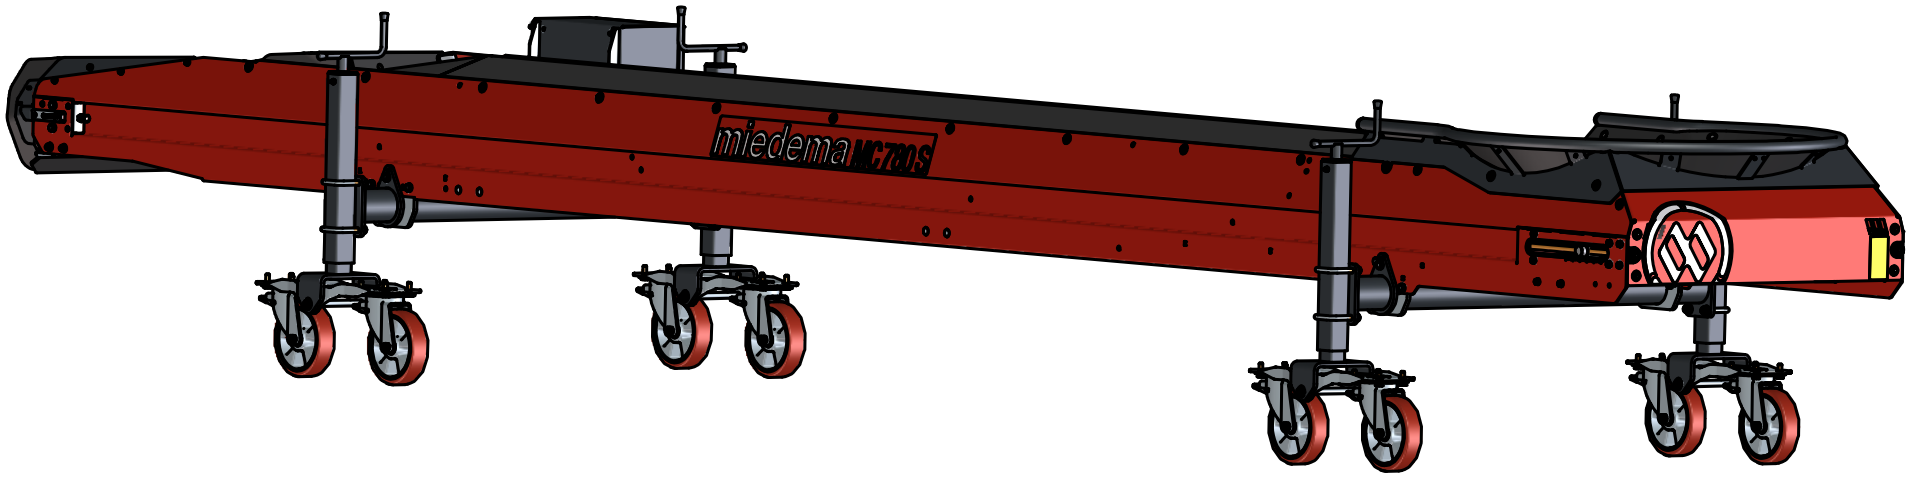


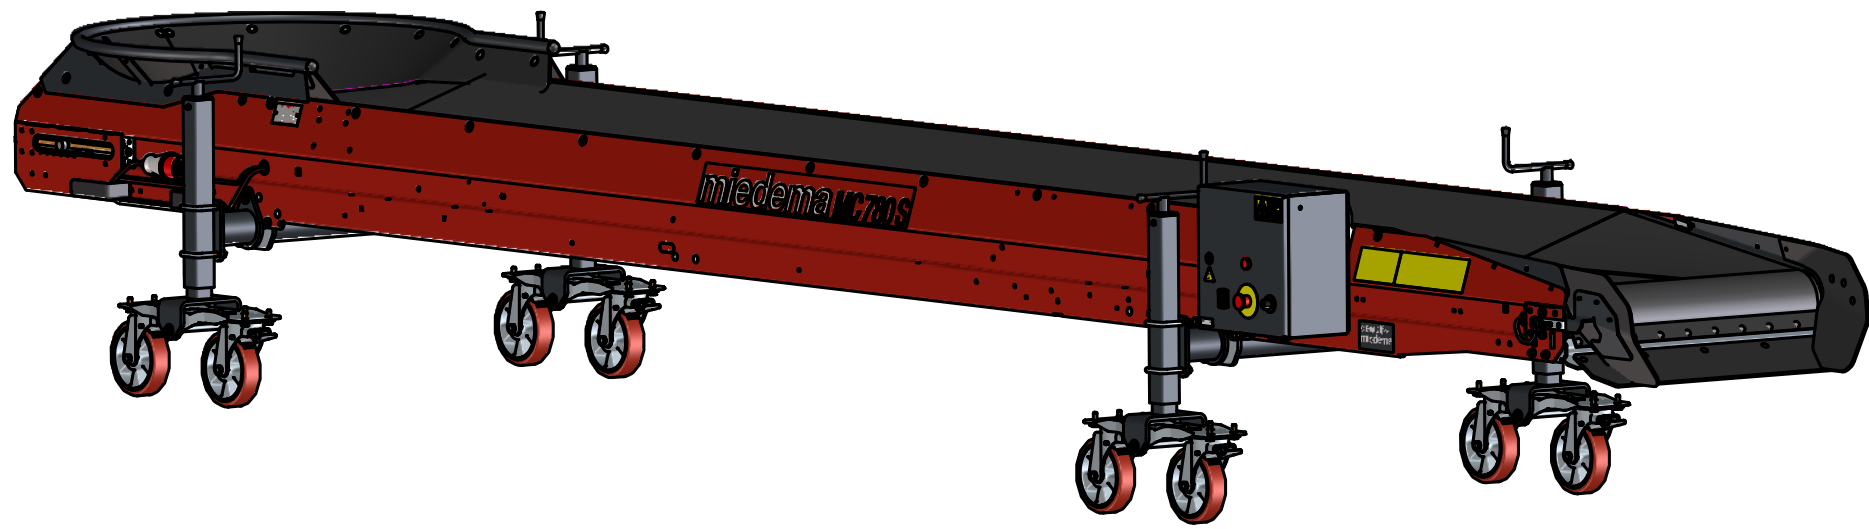

Solid swivel wheels
Input height min. = 800
Input height max. = 1400

Output height min. = 350
Output height max. = 950

Pneumatic swivel wheels
Input height min. = 950
Input height max. = 1550

Output height min. = 500
Output height max. = 1100

Specifications MC 780 S	
Conveyor type	PVC
Conveyor wideness	800mm
Trough angle	35 degrees
Capacity	2 speed
Variable belt speed	120 tonne/hour
Input diameter	200 tonne/hour
Voltage	1000 mm
	380-420VAC / 50Hz / 3~
	440-480VAC / 60Hz / 3~
	200-220VAC / 60Hz / 3~
	220-240VAC / 60Hz / 3~
	190-210VAC / 50Hz / 3~
Weight	570 kg
Drawbar load	190 kg
Optional	
Inspection lighting, 17m cable, 230VAC / 50Hz/ 1~	
Coupling element output side	
Coupling element input side	
Oil and grease resistant, food safe and blue coloured conveyor belt	
Outgoing power supply	

dewulf		Benaming	
enjoy growing		Enkele band MC 80	
Alg. ruwheid 3.2		Tech. omschr. Maatschels	
Laatste wijziging:		Mat. ()	
Am. proj.		Opp. beh.	Status work
Wijz. datum 25/08/2020		Get. HLS	Gecant.
Start datum 15/02/2016		Formaat A1	Tek. nr. MC 80
		Schaal 1:20	Versienr. 4
		Gewicht	