


Dosing slider

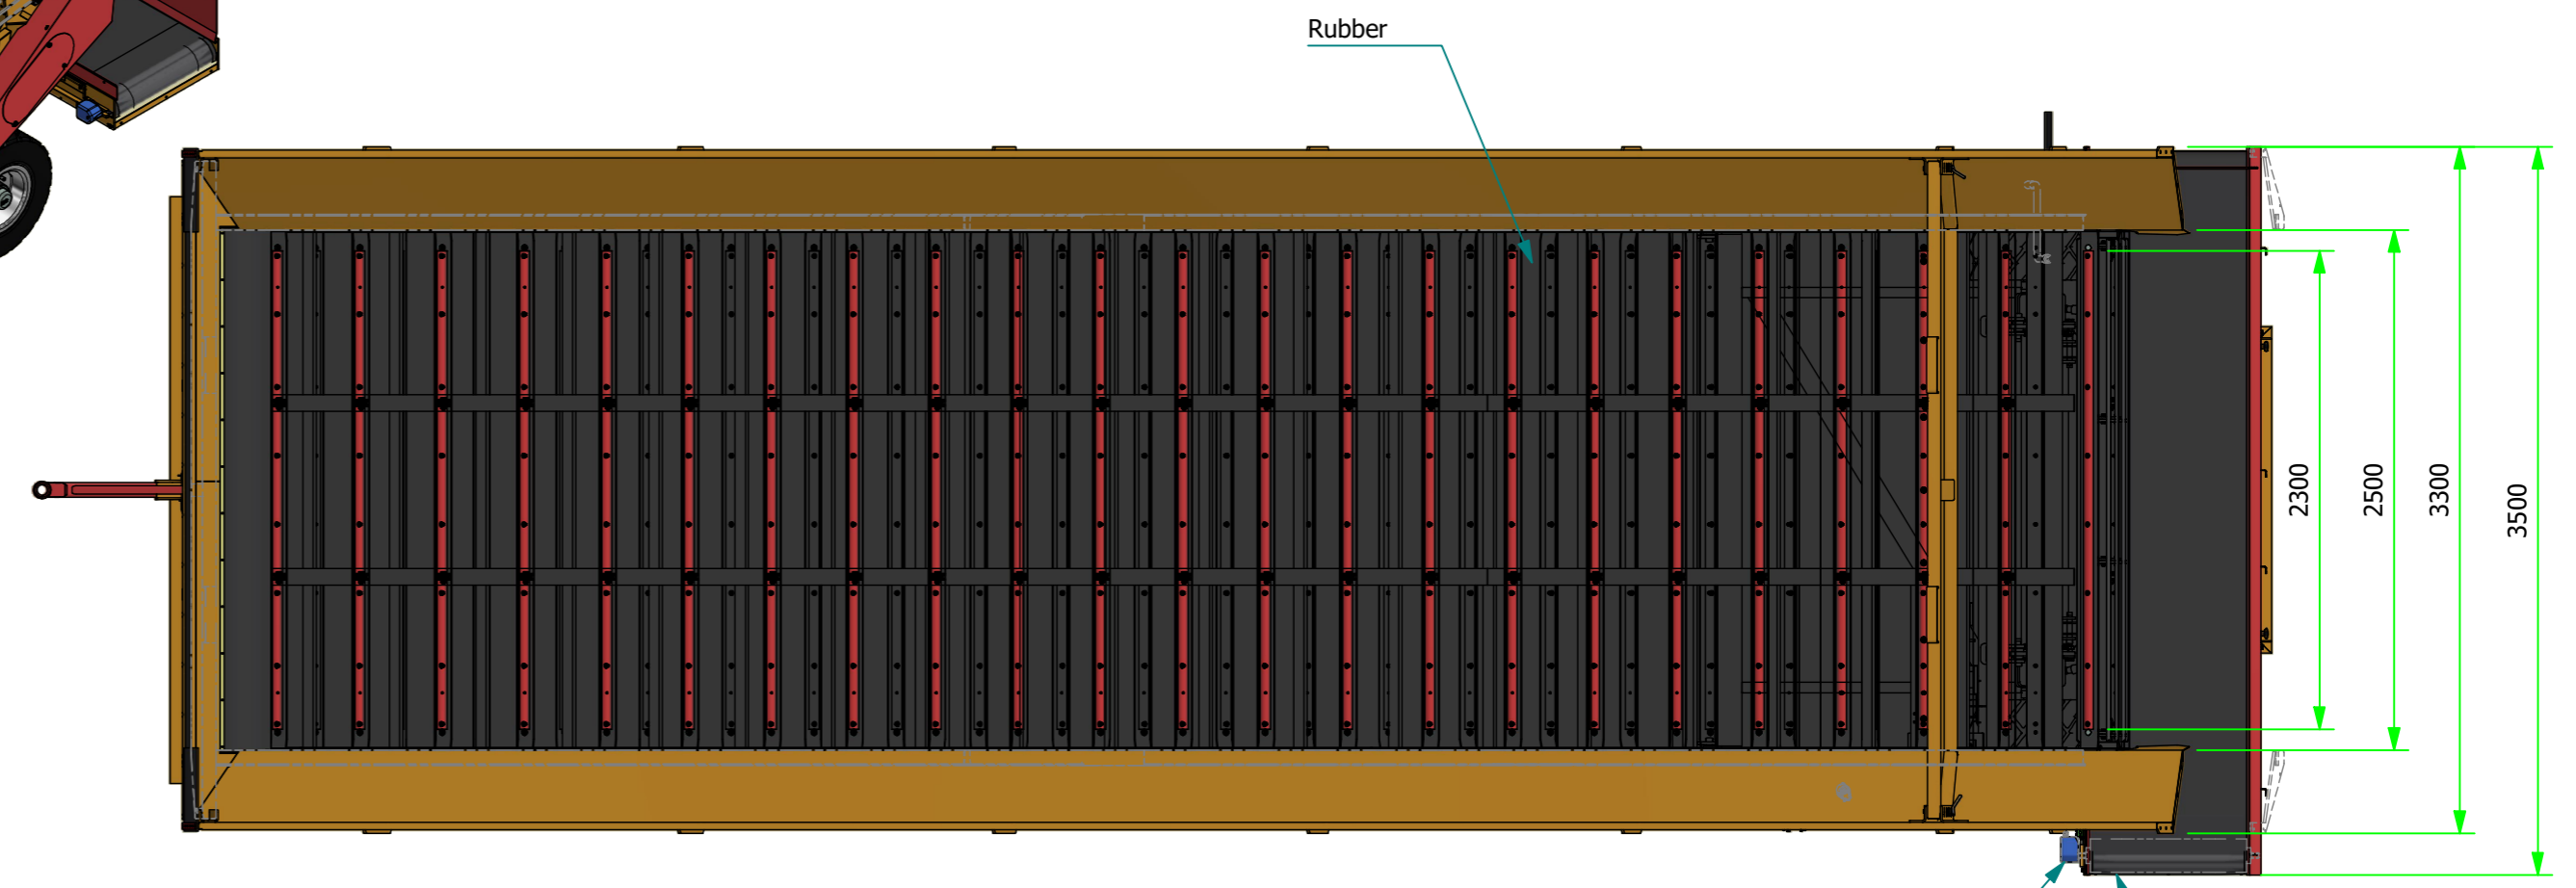


Rubber

2300
2500
3300
3500

2,2kW 1,15m/s belt drive


Variable floor speed controll
5-75Hz
 Standard: 0,27-4,1m/min
 Slow: 0,22-3,23m/min
 Fast: 0,48-7,19m/min

HDPE Impact bars (no moving parts)
Optional
 Plastic Rollers
 Steel Rollers
 Stainless steel Rollers

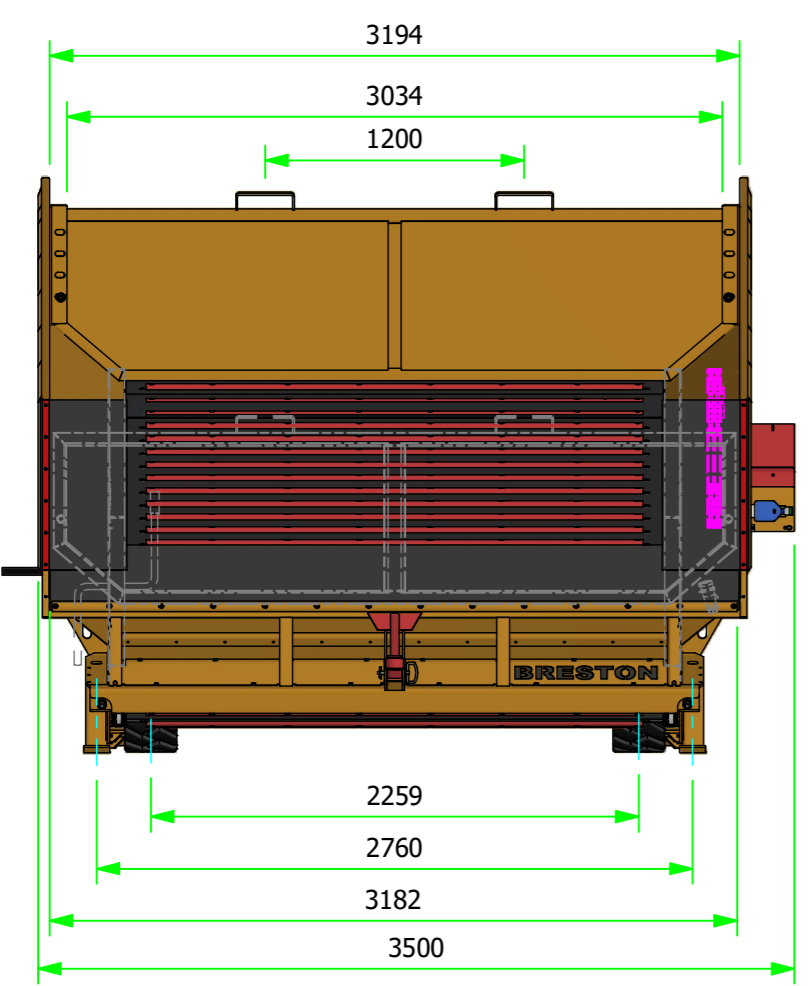

3194
3034
1200

2259
2760
3182
3500

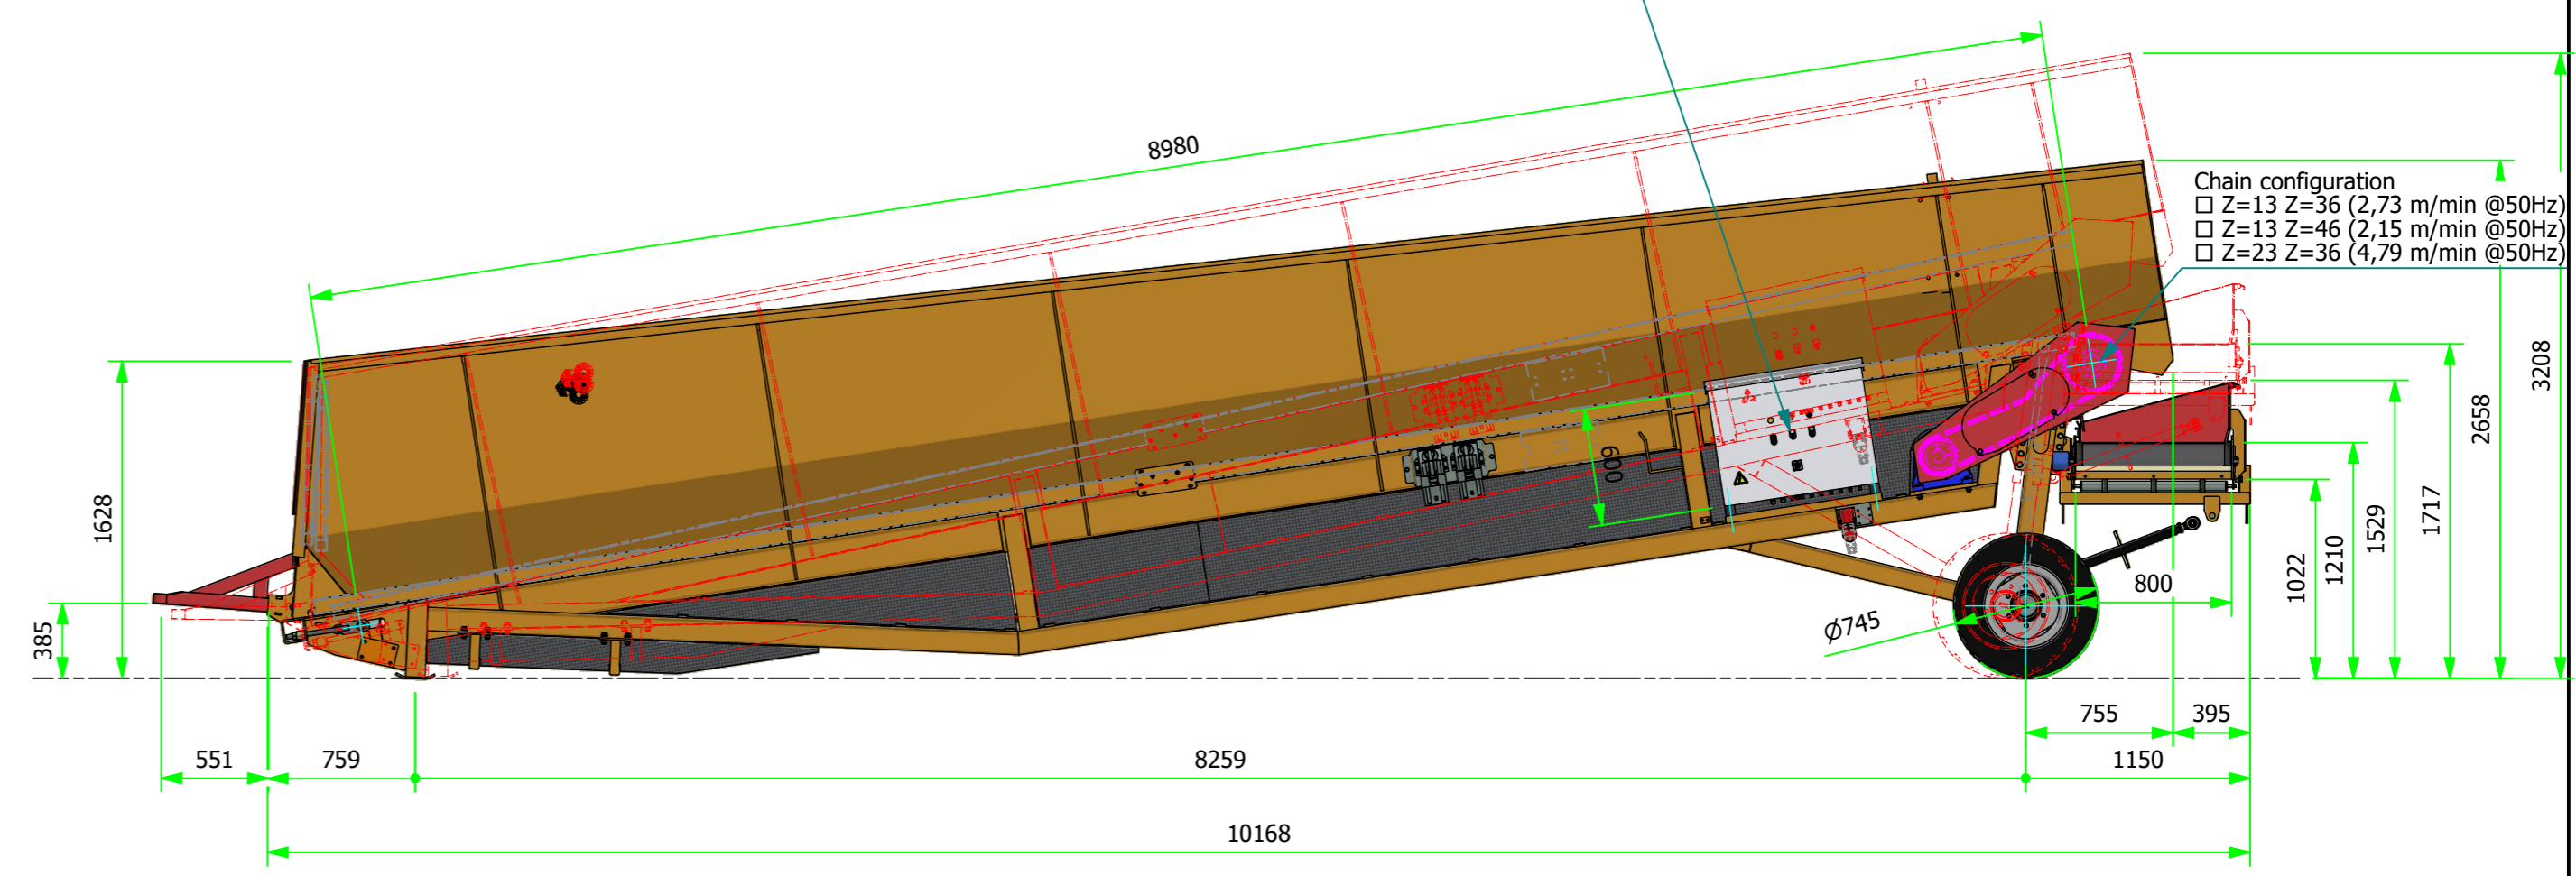

8980

1628
385

551
759

8259
10168

Ø745

800
755
395
1150

Chain configuration
 Z=13 Z=36 (2,73 m/min @50Hz)
 Z=13 Z=46 (2,15 m/min @50Hz)
 Z=23 Z=36 (4,79 m/min @50Hz)

3208
2658
1717
1529
1210
1022

NB10-250I				VAN TRIER	
Opmerking:				Opdrachtgever:	
Ontwerp:	Aangepast:	1 : 35 A2	Ordernummer:	Tekeningnummer:	Rev.:
Datum:	Laatst aangep.:			23 0509-000	
23 0509-000.idw		6604 kg		sheet 1/1	