
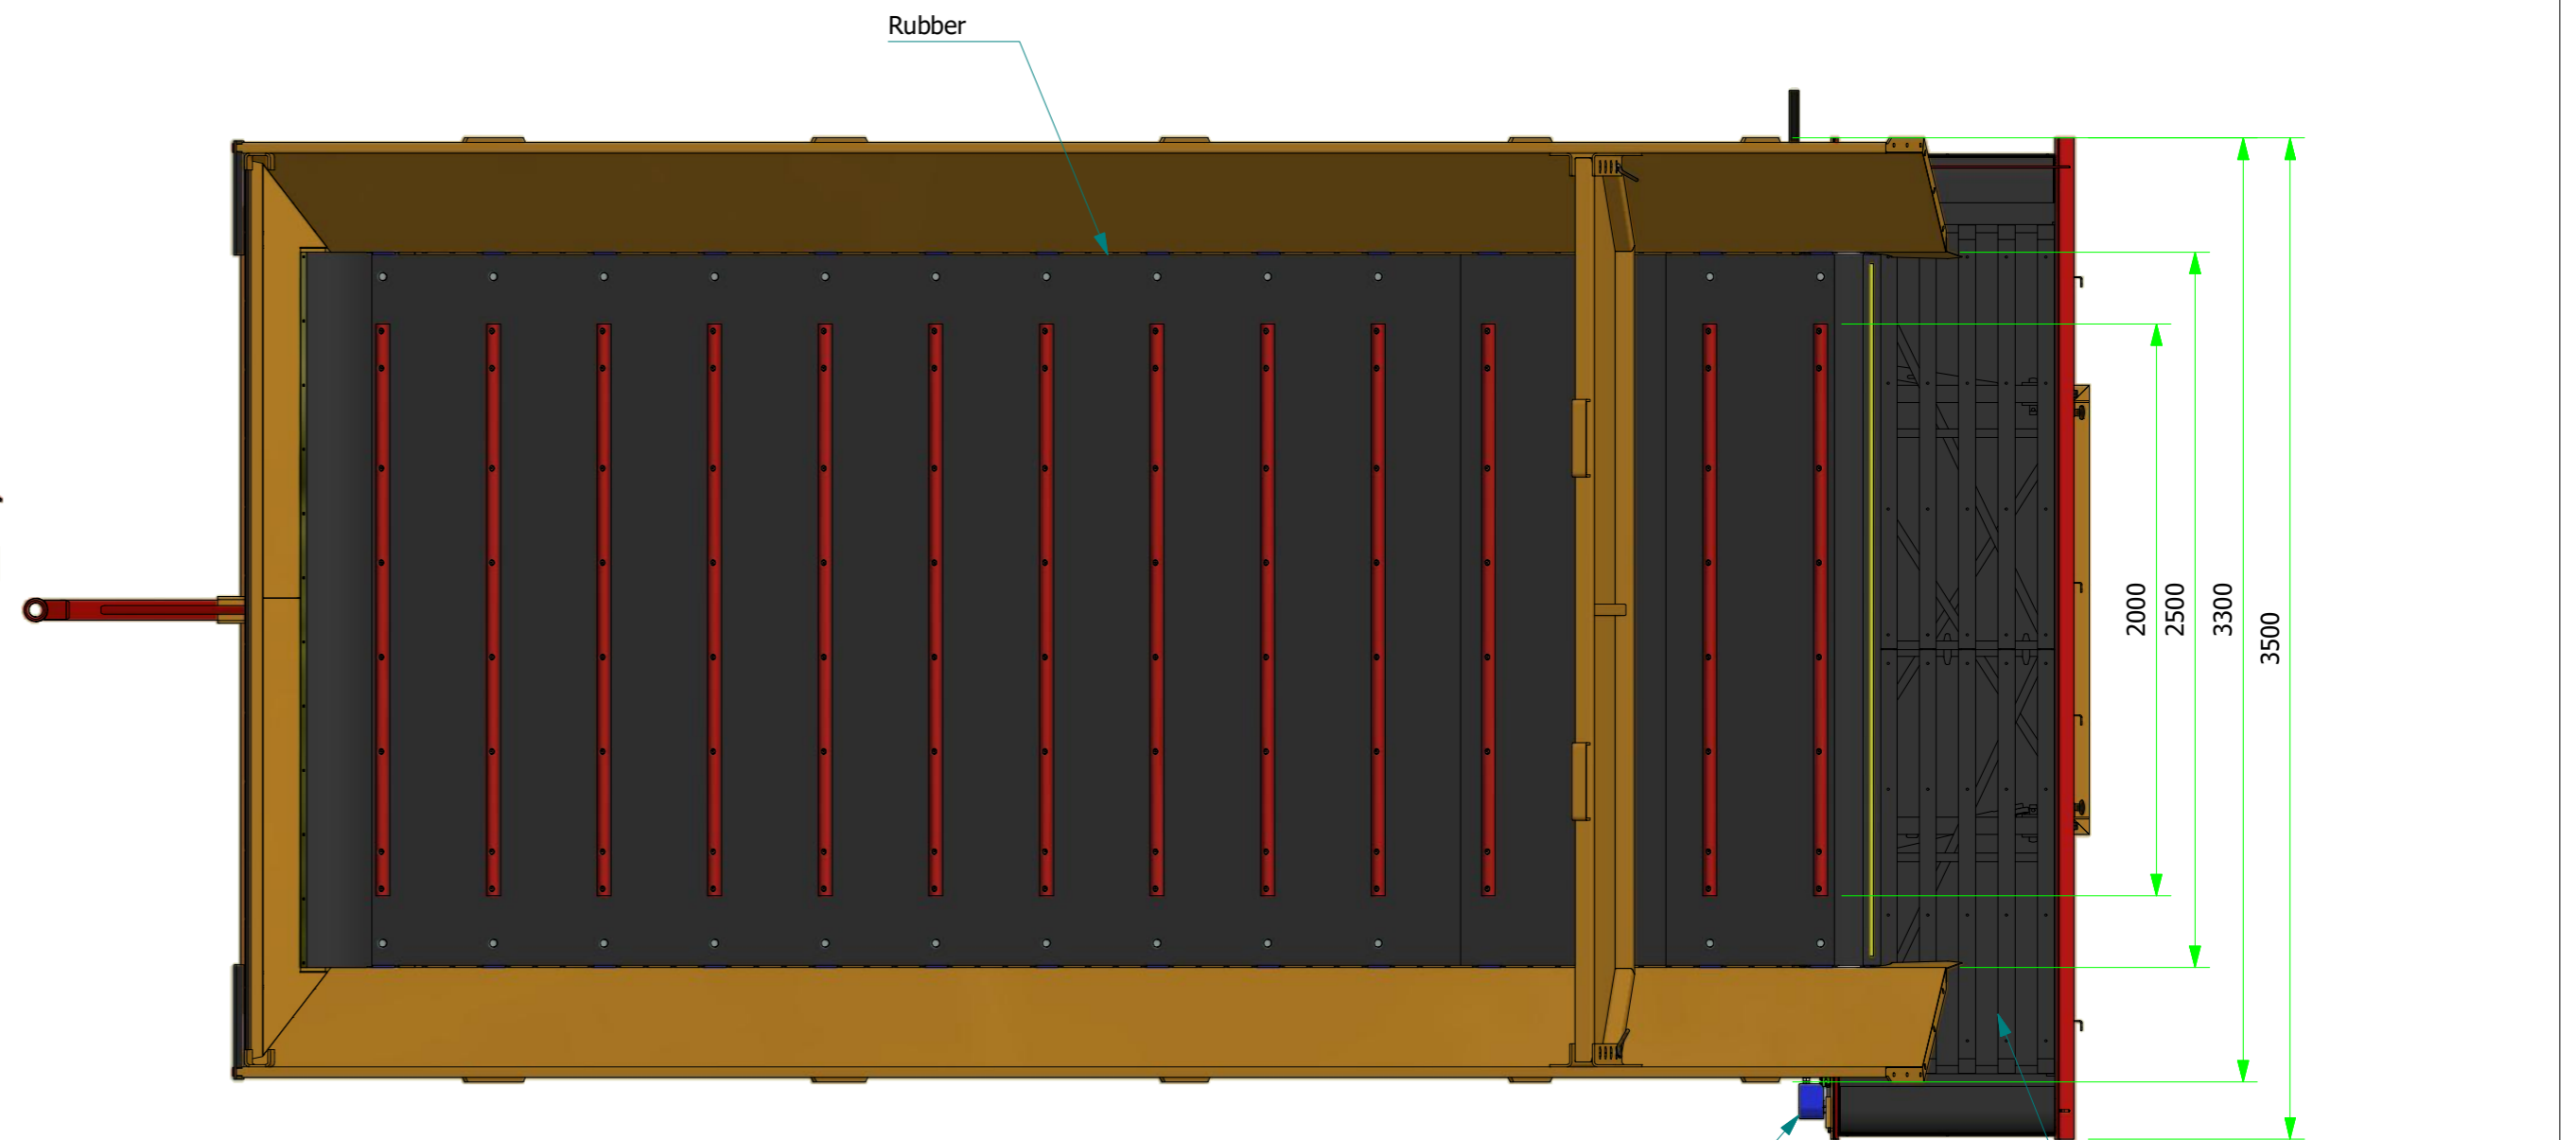


- \* Overall Options\***
- Line control
  - switched power outlet
  - Led trailer detection
  - Double rubber side flaps
  - custom options

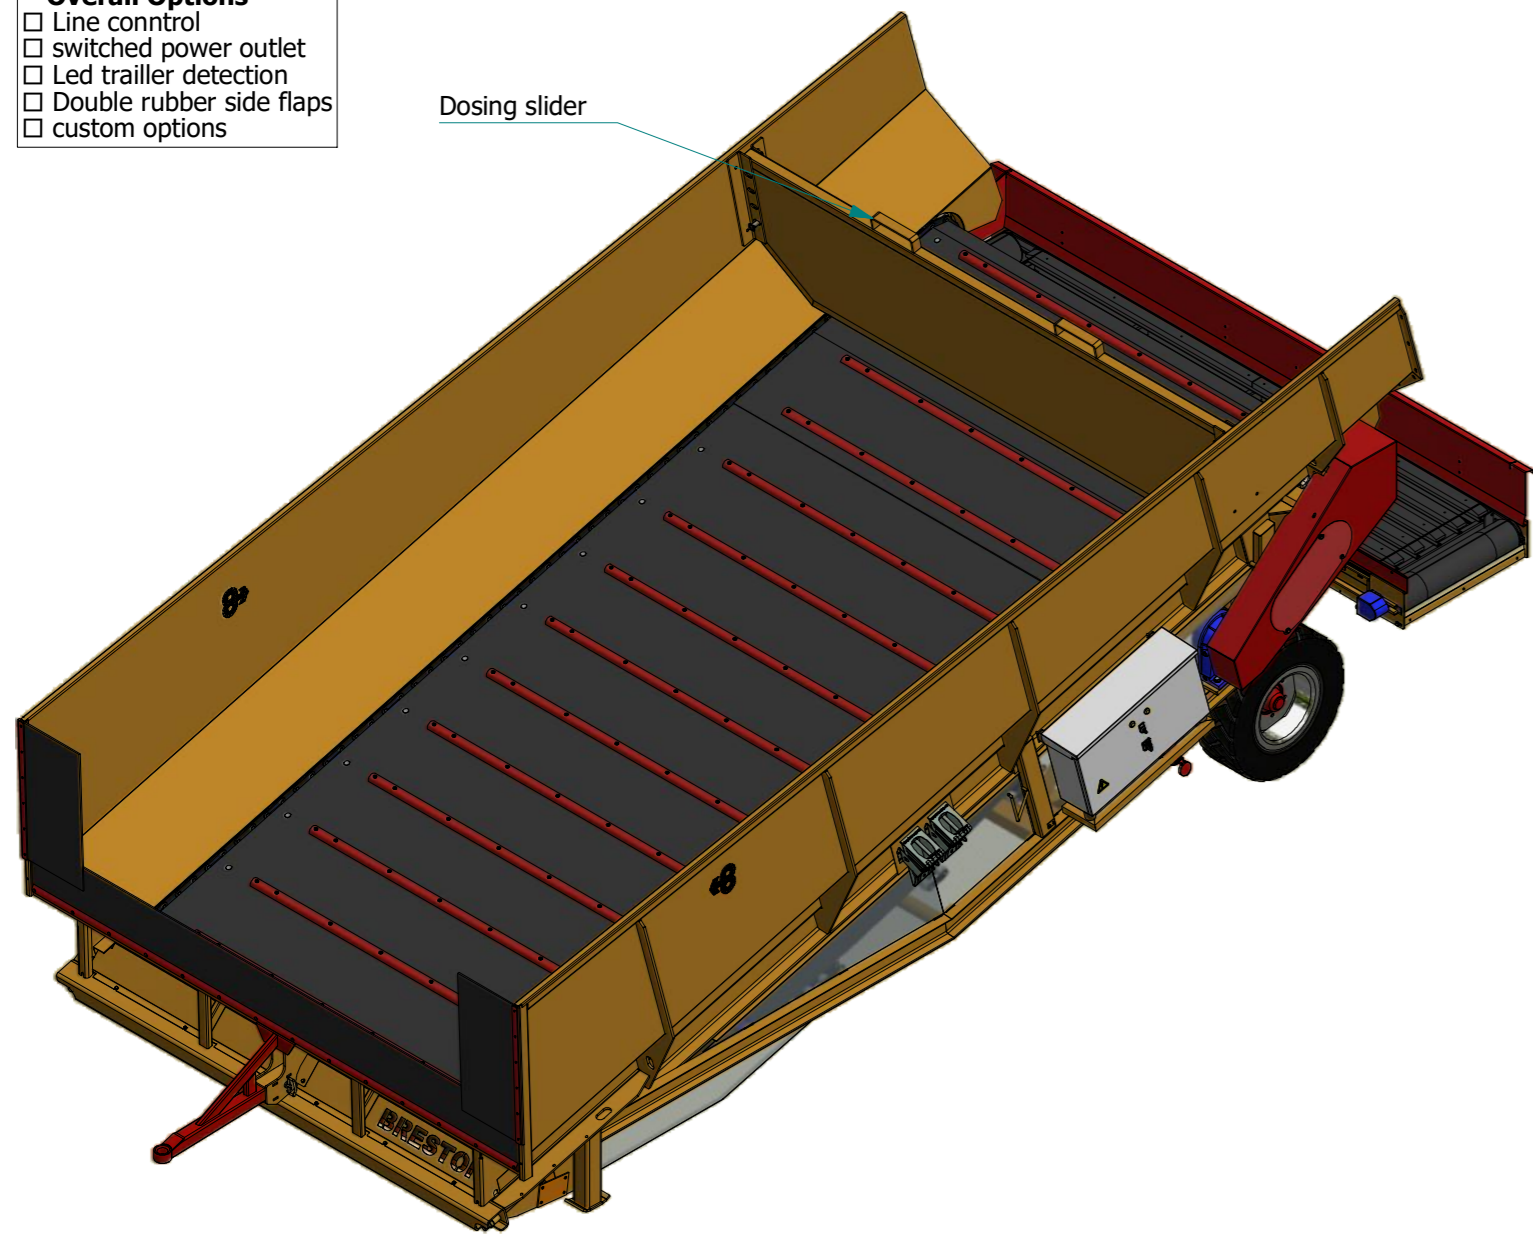

Types of NB10-250 Hoppers	
Hopper Type	Hopper Length
C	6,0m



- Variable floor speed control  
5-75Hz
- Standard: 0,27-4,1m/min**
  - Slow: 0,22-3,23m/min
  - Fast: 0,48-7,19m/min

Hopper Length (A-K)

2,2kW 1,15m/s belt drive

- HDPE Impact bars (no moving parts)  
\*Optional\*
- Plastic Rollers
  - Steel Rollers
  - Stainless steel Rollers

- Chain configuration
- Z=13 Z=36 (2,73 m/min @50Hz)
  - Z=13 Z=46 (2,15 m/min @50Hz)
  - Z=23 Z=36 (4,79 m/min @50Hz)

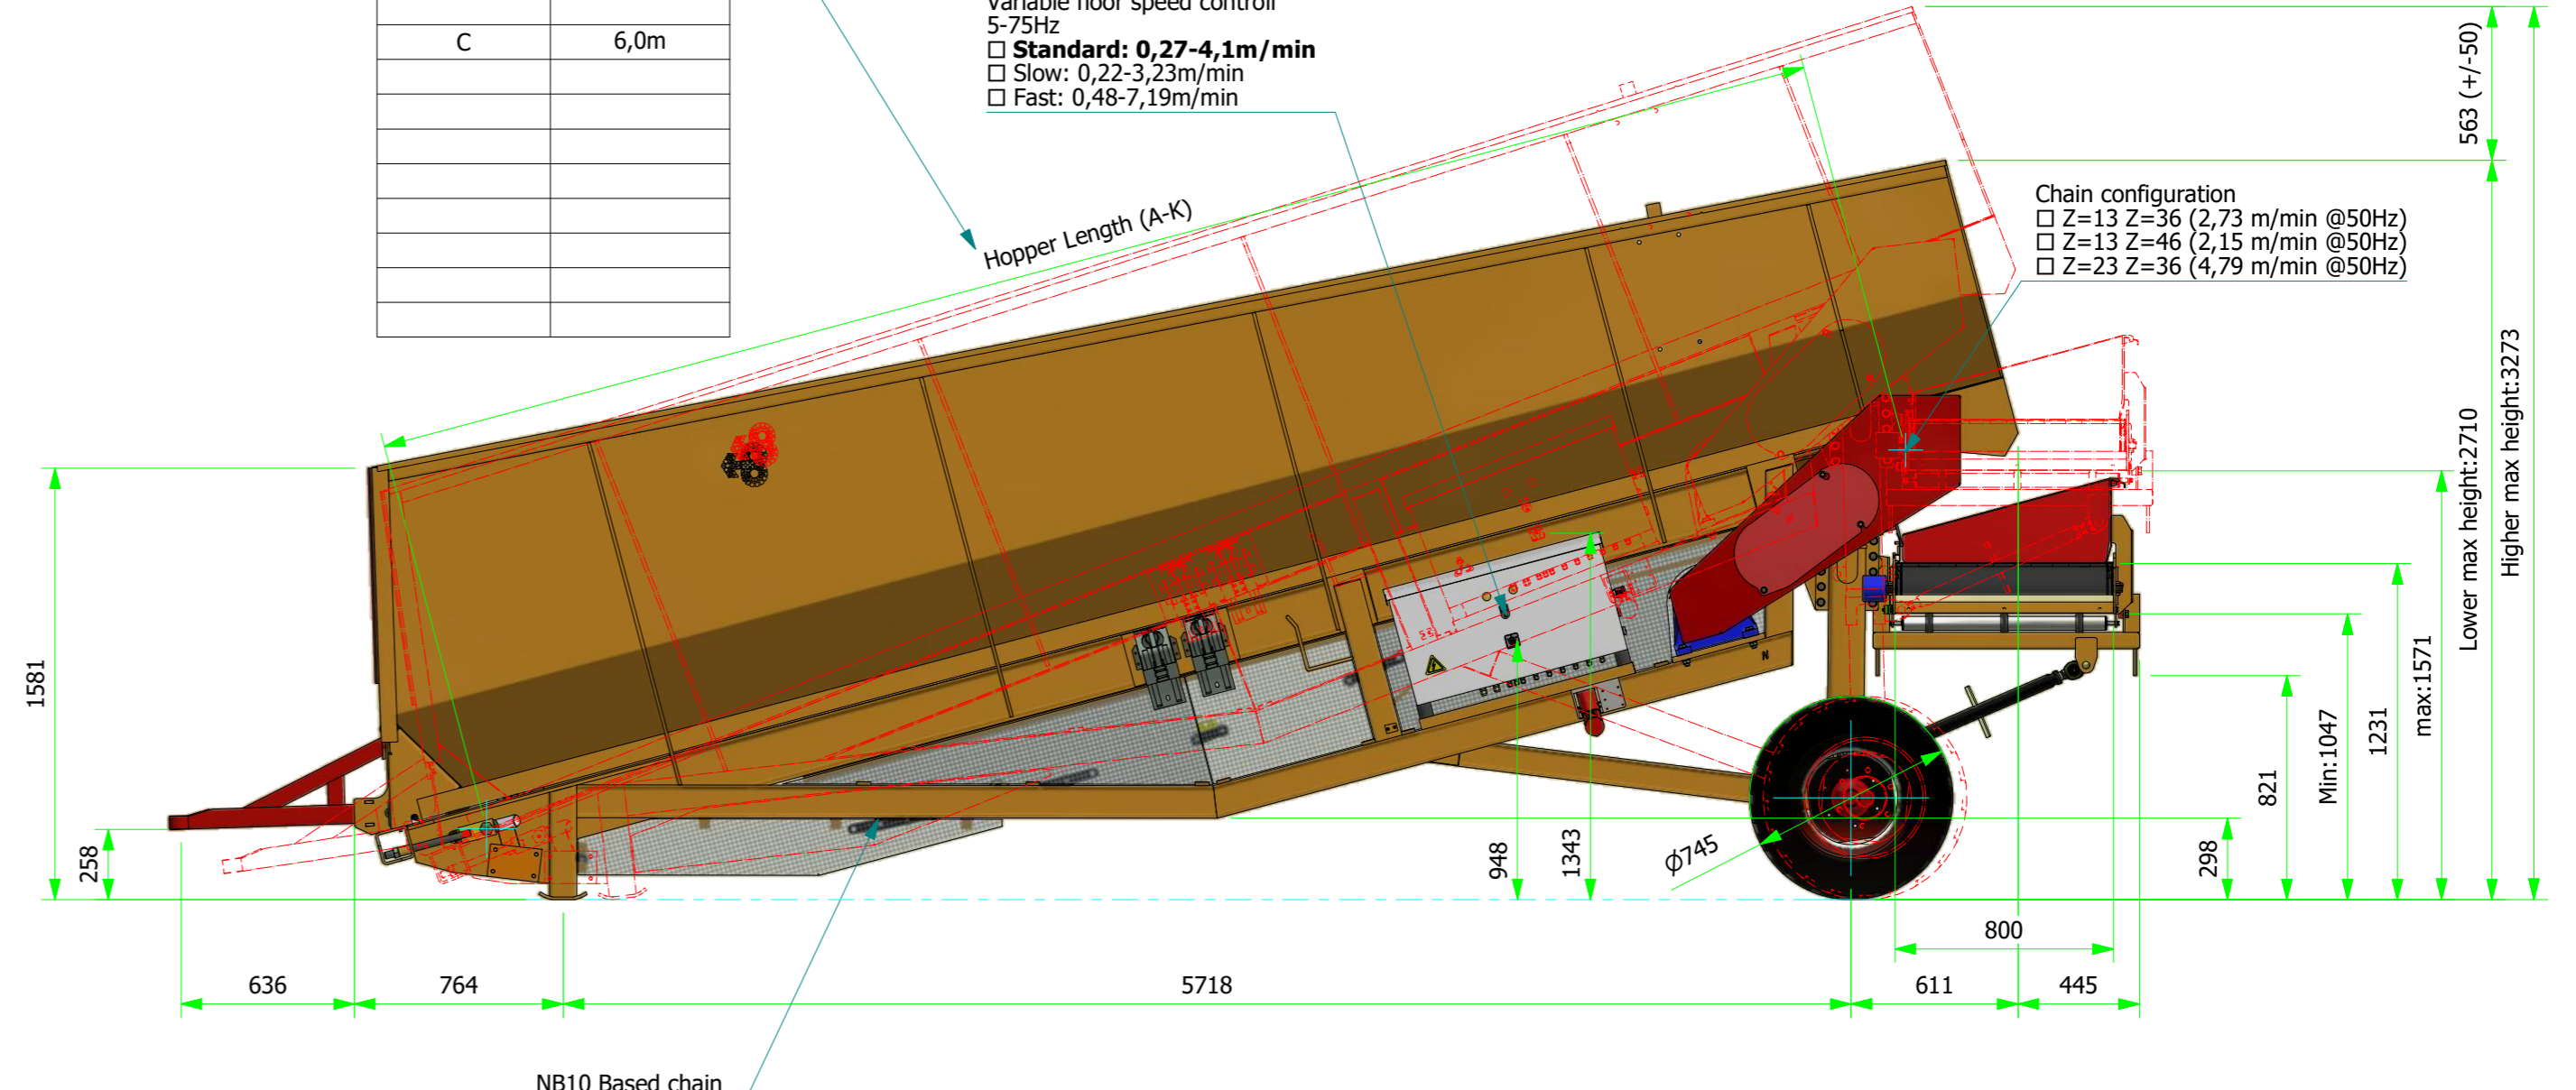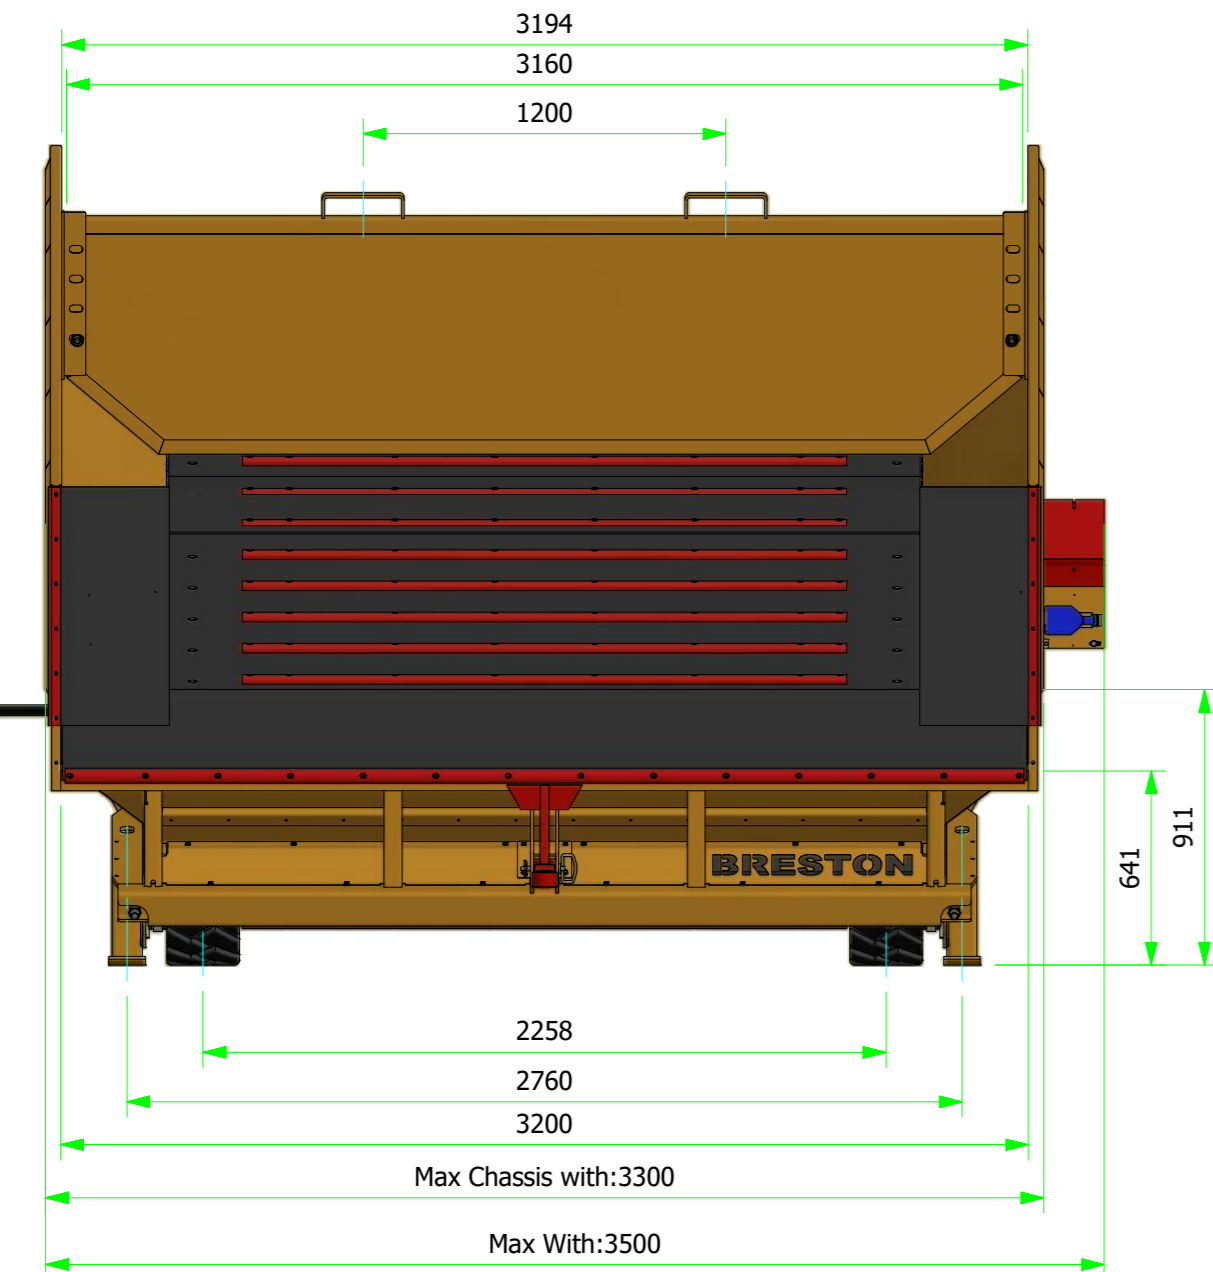

Benaming: NB10-250C Hopper	
Opmerking: RECEIVING HOPPER NB10-250A-K	
Get.: 1 : 25 A2	Ordernummer:
Datum:	Tekeningnummer:
	Rev.: